


Data sheet



sg-200.520

Ramp with movable lip

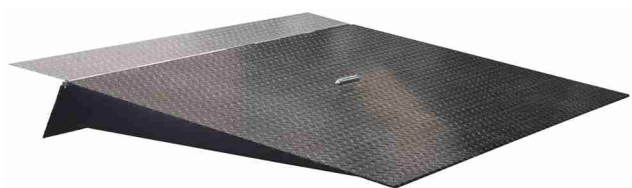

Outer dimensions:

Width:	2000 mm
Depth:	1815 mm
Height:	200 mm
Weight:	282,5 kg

Construction:	diamond-tread plate (steel), fixed welded
Colour:	RAL 9017 traffic black / painted (2K)
Load capacity:	7500 kg

- * lip dimension: 2,000 x 300 mm (W/D)
- * clearance under lip: 190 mm
- * suitable for driving in sea containers
- * inclination 7°
- * entire area of the ramp is resting on the ground when lift truck drives in
- * rises from 0 to 200 mm, movable lip for further height levelling
- * only to be used on flat surfaces with full support of the side rails
- * all 4 corners bevelled
- * reinforced steel construction
- * safety-tread steel plate for the lip 10/12 mm
- * angled at 10°
- * safety-tread steel plate for the ramp 6/8 mm
- * with flat-steel reinforcement at rear 30 x 10 mm
- * chain with hook on both sides to prevent shifting
- * with retractable lifting stirrup for transporting
- * incl. nameplate attached to the left side

EAN-Nummer: 4035694011816
Customs tariff no: 73269098
Country of origin: European Community

